



SNOWSORB®

ABSORBENT PANEL



NEW "C" SHAPE

Image of 60x60cm model Ref.:SNW060 (on the left) and Ref.:SNW060 applied (ambient image).

DESCRIPTION

In order to expand the range of options available on absorption panels, ATP® created the SNOWSORB® with an attractive shape. This model can also be used as a soundproofing reinforcement material.


This panel has a simple aesthetic format that allows various different combinations. It is ideal to be mounted on walls and ceilings, on continuous surfaces or selected spots by combining it with other models.

It is made of regular acoustic foam or of melamine foam as an option.

Commercial areas, Television studios, Pavilions, auditoriums, meeting rooms, public spaces, etc., need specific care regarding airborne noise control. The creation of surfaces that are efficient at absorbing sound waves becomes imperative, and that is the main feature that makes this product so relevant.

Due to its high absorption coefficient and low cost, the SNOWSORB® is specifically recommended product for the acoustic treatment of large areas. It can be easily cut with a sharp utility knife to be adjusted to the dimensions of walls and ceilings.

TECHNICAL DRAWINGS

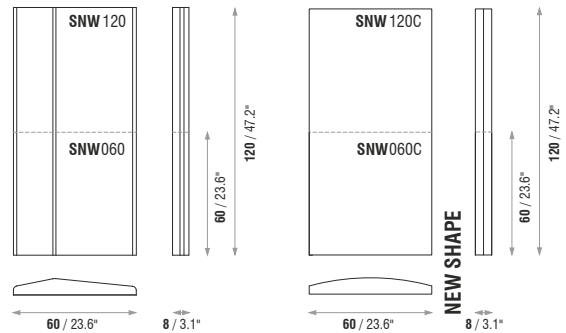


FEATURES

- Raw material: Melamine Foam or Regular Acoustic Foam.
- NRC: **0.90/m²** [$>250\text{Hz}; <10\text{KHz}$].
- **MELAMINE FOAM** - Flame resistance: Euroclass B-s1,d0 (similar to old M1 France, Germany B1,GB class1, USA V0/HF1).
- **ACOUSTIC FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Velvety Finishing available.
- Very easy to install.
- 100% recyclable.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
SNW120	120 cm (47.2 in)	60 cm (23.6 in)	8 cm (3.1 in)	1.2 Kg (2.65 lbs)
SNW060	60 cm (23.6 in)	60 cm (23.6 in)	8 cm (3.1 in)	0.6 Kg (1.32 lbs)
SNW120C	120 cm (47.2 in)	60 cm (23.6 in)	8 cm (3.1 in)	1.2 Kg (2.65 lbs)
SNW060C	60 cm (23.6 in)	60 cm (23.6 in)	8 cm (3.1 in)	0.6 Kg (1.32 lbs)


ABSORPTION COEFFICIENT

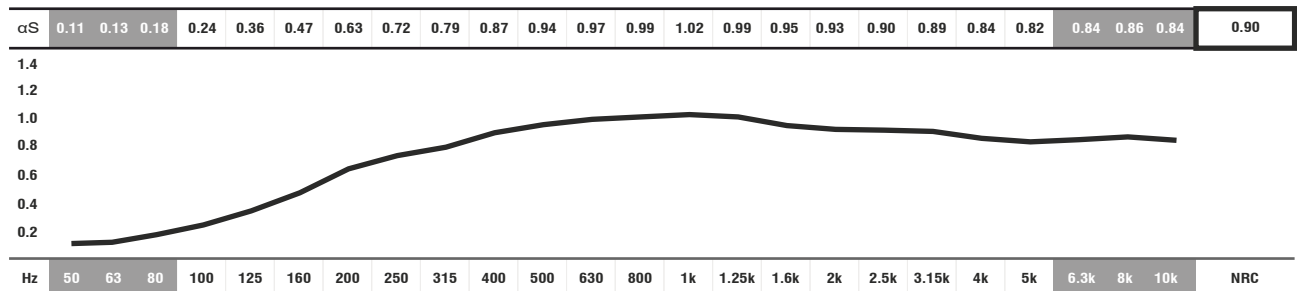

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

REGULAR AND MELAMINE FOAM COLOURS

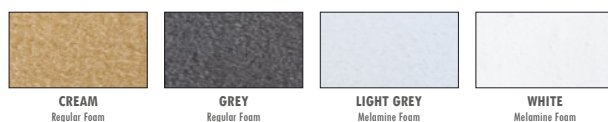

VELVETY COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

