




STILLNESS III[®]

SOUNDPROOFING PLATES

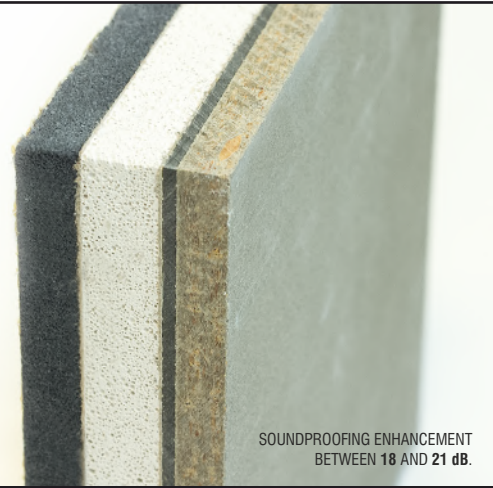

SOUNDPROOFING ENHANCEMENT
BETWEEN 18 AND 21 dB.

Image of STILLNESS III, Ref.:STLLIII, Soundproofing Plates of four layers.

FEATURES

- Depending on the constitution of the base of the wall or ceiling, this material can enhance the sound insulation between **18 and 21 dB**.
- Reduces sound transmission loss property. Installation: with screws or contact glue.
- Fire-resistance: B-s1,d0 (similar to old M1).
- Environmentally friendly material. High-density board surface, paintable.
- Suitability of a large-area of construction and use.
- Total thickness: **3.3 cm (1.3")**.

SIZES AND SPECIFICATIONS

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
STLL III	200 cm (78.7 in)	120 cm (47.2 in)	3.4 cm (1.3 in)	53.5 Kg (117.95 lbs)

DESCRIPTION

STILLNESS[®] III is a damping system and sound insulation board composed of anti-vibration and massive elements. We select inorganic materials with different densities and thicknesses to form a composite layer with the best properties of sound insulation and vibration damping in order to effectively insulate the medium-low and low frequencies of the sound transmission. The layers of each compound model are sandwiched and adhere under high pressure. These composite vibration damping and sound insulation board are much more practical than the traditional layer-by-layer construction and provides an effective sound reduction rate of walls and ceilings in all types of applications, from the music business to the industrial markets. This multi-layer structure is portable and simple to install by using screws or contact glue and it is easy to cut to adjust to the room dimensions.


STILLNESS[®] III is composed by:

- 1 layer of (10mm/ 0.4") Polyurethane - Floatsheet[®] INS, 1 layer of (13mm/ 0.5") Gypsumboard, 1 layer of (3mm/ 0.1") Floatsheet[®] VIB and 1 layer of (8mm/ 0.3") cement fibre board.



STILLNESS IV[®]

SOUNDPROOFING PLATES

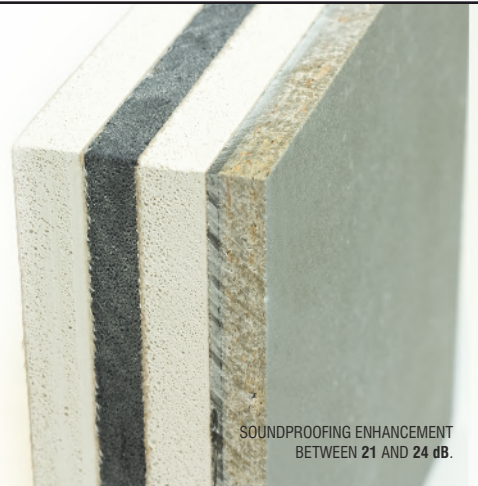

SOUNDPROOFING ENHANCEMENT
BETWEEN 21 AND 24 dB.

Image of STILLNESS IV, Ref.:STLLIV, Soundproofing Plates of five layers.

FEATURES

- Depending on the constitution of the base of the wall or ceiling, this material can enhance the sound insulation between **21 and 24 dB**.
- Reduces sound transmission loss property. Installation: with screws or contact glue.
- Fire-resistance: B-s1,d0 (similar to old M1).
- Environmentally friendly material. High-density board surface, paintable.
- Suitability of a large-area of construction and use.
- Total thickness: **4.6 cm (1.8")**.

SIZES AND SPECIFICATIONS

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
STLL IV	200 cm (78.7 in)	120 cm (47.2 in)	4.7 cm (1.9 in)	70.7 Kg (155.87 lbs)

DESCRIPTION

STILLNESS[®] IV is a damping system and sound insulation board composed of anti-vibration and massive elements. We select inorganic materials with different densities and thicknesses to form a composite layer with the best properties of sound insulation and vibration damping in order to effectively insulate the medium-low and low frequencies of the sound transmission. The layers of each compound model are sandwiched and adhere under high pressure. These composite vibration damping and sound insulation board are much more practical than the traditional layer-by-layer construction and provides an effective sound reduction rate of walls and ceilings in all types of applications, from the music business to the industrial markets. This multi-layer structure is portable and simple to install by using screws or contact glue and it is easy to cut to adjust to the room dimensions.

STILLNESS[®] IV is composed by:

- 1 layer of (13mm/ 0.5") Gypsumboard, 1 layer of (10mm/ 0.4") Polyurethane - Floatsheet[®] INS, 1 layer of (13mm/ 0.5") Gypsumboard, 1 layer (3mm/ 0.1") of Floatsheet[®] VIB and 1 layer of (8mm/ 0.3") cement fibre board.

IMPORTANT NOTICES

- JOCAVI[®] accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range. Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

